

Product: Titan - SP019

Category: Printing UV Blankets

Features


- Specifically designed for the latest UV applications (LE/HUV, LED UV, H-UV)
- Excellent printing quality (solid half tone reproduction)
- Very good ink release
- Reduced ink back-trapping
- Implements all benefits of the Dynatech System:
 - Excellent smash and edge marks resistance
 - Better vibration absorption

Application

- All UV applications

Cross Section

1.96 mm thickness, 3-ply

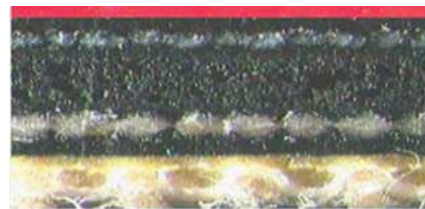

Technical Data

INK COMPATIBILITY	UV
PRINTING SURFACE COLOUR	Red
PRINTING SURFACE FINISH	Micro buffed polished
THICKNESS (mm)	1,96
AVERAGE LOAD VALUE N/cm ² @ 0,23 mm Indentation	250
SURFACE ROUGHNESS (Ra micron)	0,8
ELONGATION (%)	<0,9
TENSILE STRENGTHS (N/mm)	>70
WATER & SOLVENT PROTECTION	No

ADDITIONAL INFORMATION

ADDED FEATURES	Dynatech System
----------------	-----------------

The information and recommendations in this publication are, to the best of our knowledge, reliable. Suggestions made concerning uses or applications are only the opinion of Ball & Doggett, and users should make their own tests to determine the suitability of this product for their own particular purposes. However, because of numerous factors affecting results, Ball & Doggett makes no warranty of any kind, expressed or implied, including those of merchantability and fitness for particular purpose, other than that the material conforms to its applicable current standard specifications. Standard specifications, although current at the time of publication, are subject to change without notice. Please refer to the MSDS.